



218T SERIES

REMOTE DISPLAY WITH INTEGRATED TRAFFIC LIGHT



Combine traffic control and
high-intensity weight display in
a single device to save time,
space and money.



THURMANSCALE.COM

THURMAN SCALE
Since 1918

218T SERIES REMOTE DISPLAY WITH INTEGRATED TRAFFIC LIGHT



DESIGNED TO WITHSTAND THE ELEMENTS

Thurman Scale's 218T Series remote displays are made to perform in the harsh, real-world environments that truck scale applications demand and it is compatible with every known scale instrument that has continuous output capability.

218T FEATURES

- Bright red, high-intensity LED with 5.0" characters.
- Large 5" Diameter green DOT/ Red X
- NEMA 3 rated enclosure for outdoor use.
- Gross and Net legends (GR-NT).
- LB and KG legends.
- Display interfaces include RS232, RS485 and 20mA (active or passive). Wireless RS232 accessory sold separately.
- Programmable learning interface.
- Time and date capability (standard).
- Optional temperature module.

ACCESSORY 778 SPECIFICATIONS

- | | |
|-------------------------------|--|
| Construction | Black powder-coated steel enclosure |
| Display type | High-intensity light emitting diode (LED) |
| Life expectancy | More than 11 years |
| Visibility | Up to 300 feet |
| Control box | Automatic or manual |
| Accessories/Options | <ul style="list-style-type: none"> • Slipfitter for 4.5" pole • Bracket for wall mounting • 4.5" x 8' aluminum traffic pole with natural finish • Square, aluminum pole base • Complete installation kits |




Shown with optional slipfitter.



218T SPECIFICATIONS

- | | |
|------------------------------------|--|
| Display type | High-intensity, light emitting diode (LED) |
| Digit color/size | Bright red, 5.0" |
| Traffic light color/size | 5" diameter green DOT/Red X |
| LED life expectancy | More than 11 years |
| Time/Date functions | Standard |
| Power | 117 VAC +/- 15% 50/60 Hz, 100 mA |
| Storage Temperature | 0° F to 150° F |
| Interface options | RS232 |
| | RS485 |
| | 20mA (active or passive) |
| Enclosure material | Painted steel, black, powder coat |
| Enclosure rating | NEMA 3 |
| Viewing distance | Up to 300 feet |
| Mounting options | Pole or wall mount (see accessories below) |
| Humidity | 0% to 95% non-condensing |
| Shipping weight | 35 lbs |
| Accessories | Optional temperature module, |
| | Pole and pole mounting hardware, |
| | Wireless RS232, |
| | Relay box for traffic light control |

DIMENSIONS

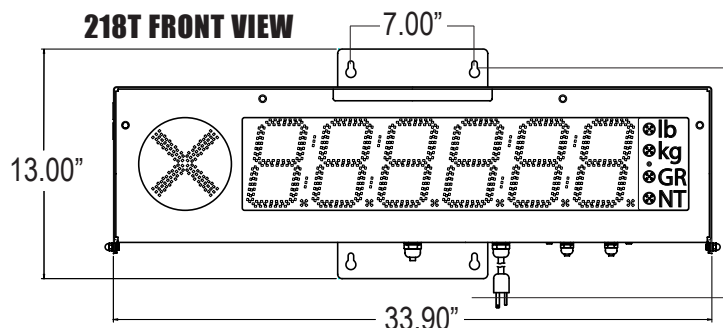

ACC 778 FRONT VIEW

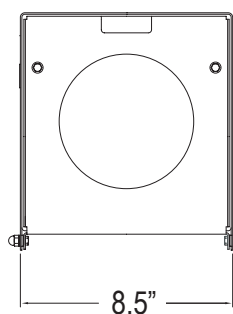

SIDE VIEW - BOTH UNITS

(800) 688-9741

Call between 8:00 a.m. – 5:00 p.m. Central Time
6800 W. 64th Street, Overland Park, Kansas 66202 • (614) 221-9077
Internet Address: <http://www.thurmanscale.com>

